

MAXIMUS-3



JL/JLU WRANGLER

JL REAR BUMP STOPS (2.5" - 3.5" LIFT)

(Fits 2018 to Current Jeep JL/JLU Wrangler Left Hand Drive Only)

Maximum tire diameter = 37 Inches.


PART #: JL5009BS

INSTALLATION STEPS

Estimated Install Time: 15 Minutes

PLEASE MAKE SURE YOU READ AND UNDERSTAND THE ENTIRE INSTALLATION GUIDE BEFORE YOU START. WE EXPECT YOU TO HAVE BASIC MECHANICAL ABILITIES TO PERFORM THIS INSTALLATION.

WE RECOMMEND THAT YOU SEPARATE AND IDENTIFY ALL THE PARTS AND HARDWARE KITS YOU RECEIVED WITH YOUR SHIPMENT BEFORE YOU PROCEED.

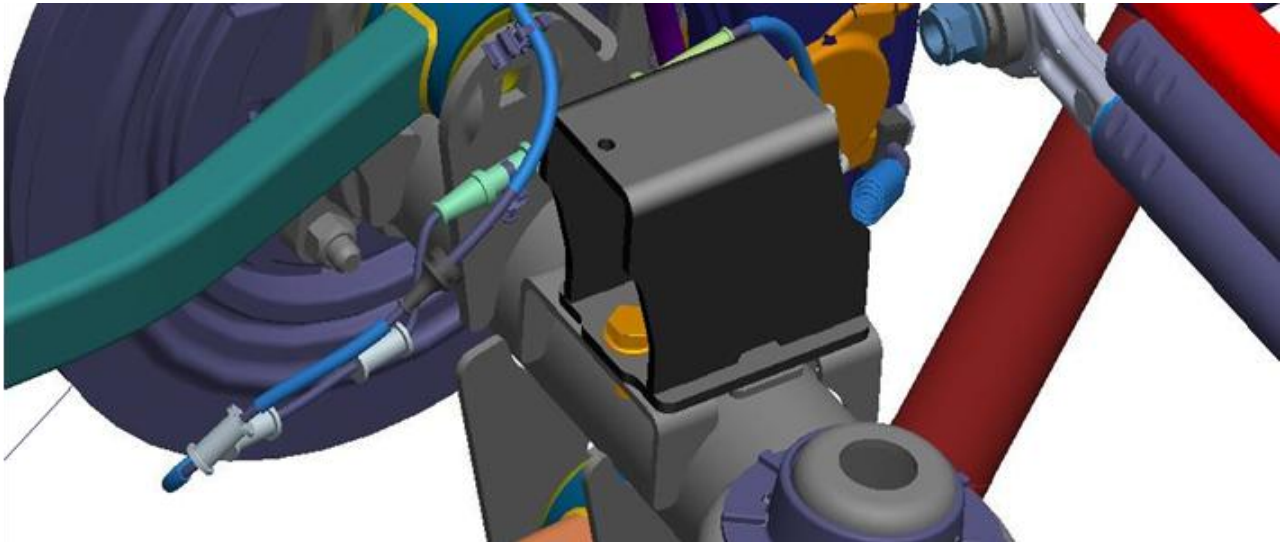

IMPORTANT

Follow these instructions precisely. Maximus-3 is not liable for any damage caused by improperly installed products. It is the purchaser's responsibility to ensure both the installation and maintenance are performed properly as set forth in this guide. We recommend using anti-seize paste on all non-thread lock bolts.

Parts List:	Qty
Rear Bump Stops	2

Hardware List	
3/8" x 1 Flange Hex Bolts	4
3/8 Flange Nuts	4

Tools Required:


- ✓ Basic Hand Tools
- ✓ Metric Sockets/wrenches



INSTALLATION STEPS

Install your new Maximus-3 Bump Stop Pads on the rear axle as shown below using the hardware supplied.

- Use 2 bolts and nuts on each side.
- Make sure you install them in the orientation shown (see picture below).
- Please note orientation of the bump stop.

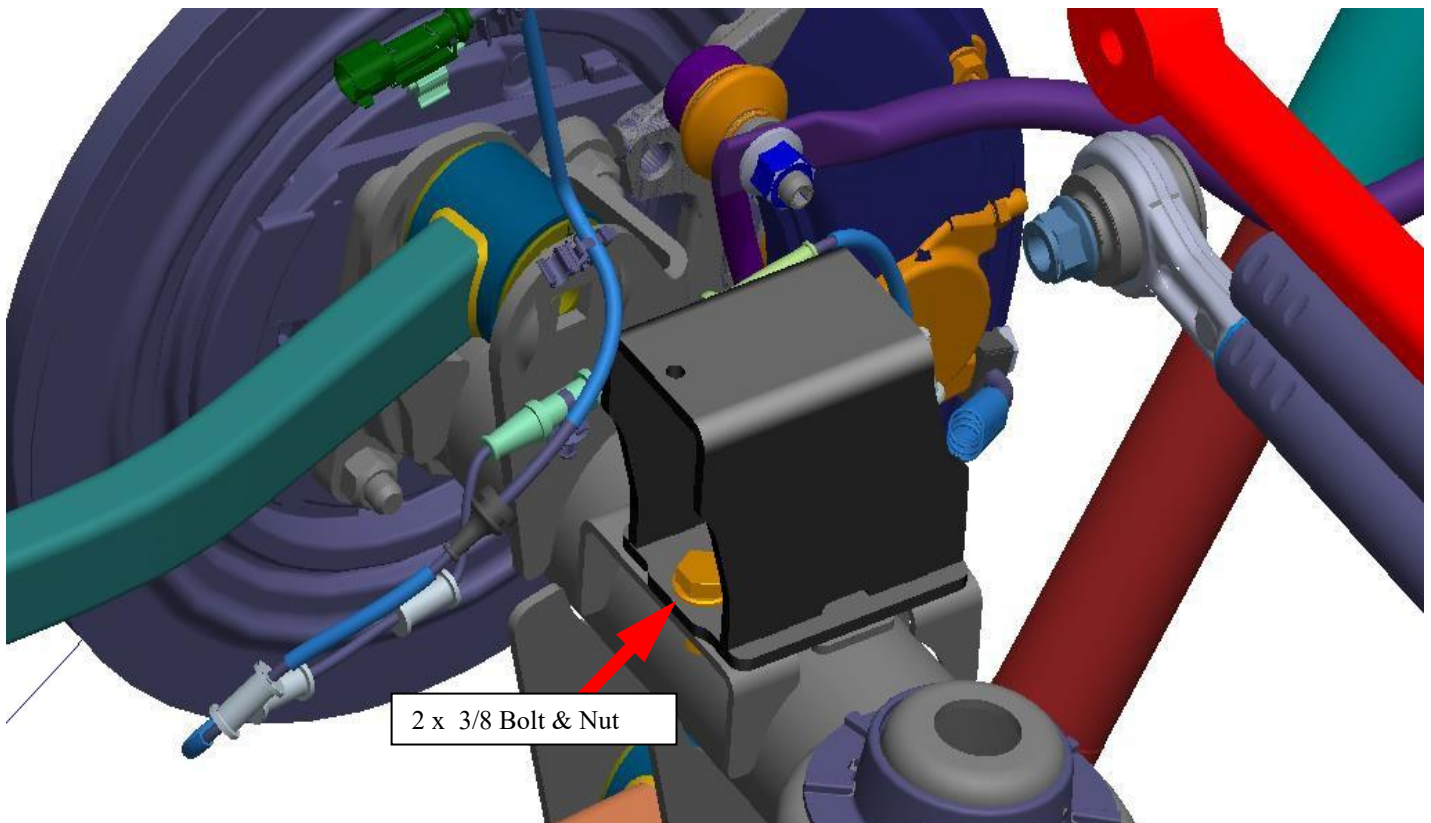

Your installation is complete. If you have questions regarding this installation, please contact us at sales@maximus-3.com or call 248-821-6654.